




ГМН83В modulator tetrode

This valve measures 147x65mm overall and has a 4 pin base



Heater voltage	25V
Heater current	2 to 2.5A
Min peak anode current	15A
Max anode voltage	18kV
Max screen voltage	1.25kV
Max temperature of envelope and seals	200°C

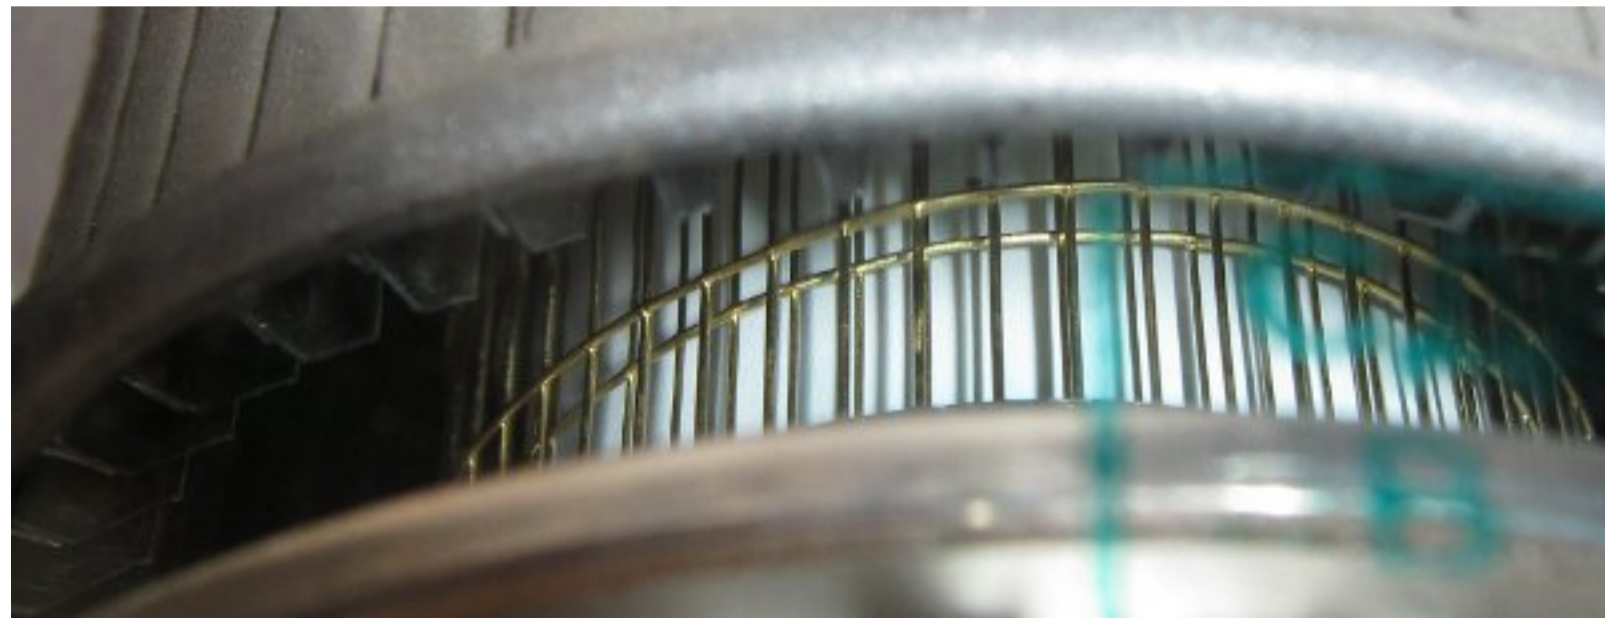

View of the grids and cathode.

Pin	Function
1	Control grid
2	Heater + cathode
3	Heater
4	Screen grid
TC	Anode





This file was last modified 15:47:20, Tuesday September 02, 2014