



About	Exhibits	Updates	Equipment
Supporters			
Docs / info		Wanted!	Sales
Links / traders			

Tesla RD200B triode




This valve measures 268x78mm overall and has a 4 pin base

This is a transmitting triode designed as an RF amplifier or oscillator in class B or C. It can also be used as an audio amplifier in class A.

Filament voltage	10.8V
Filament current	4A
Max anode voltage	2.5kV
Max anode current	275mA
Max anode dissipation	200W
Max operating frequency	60MHz



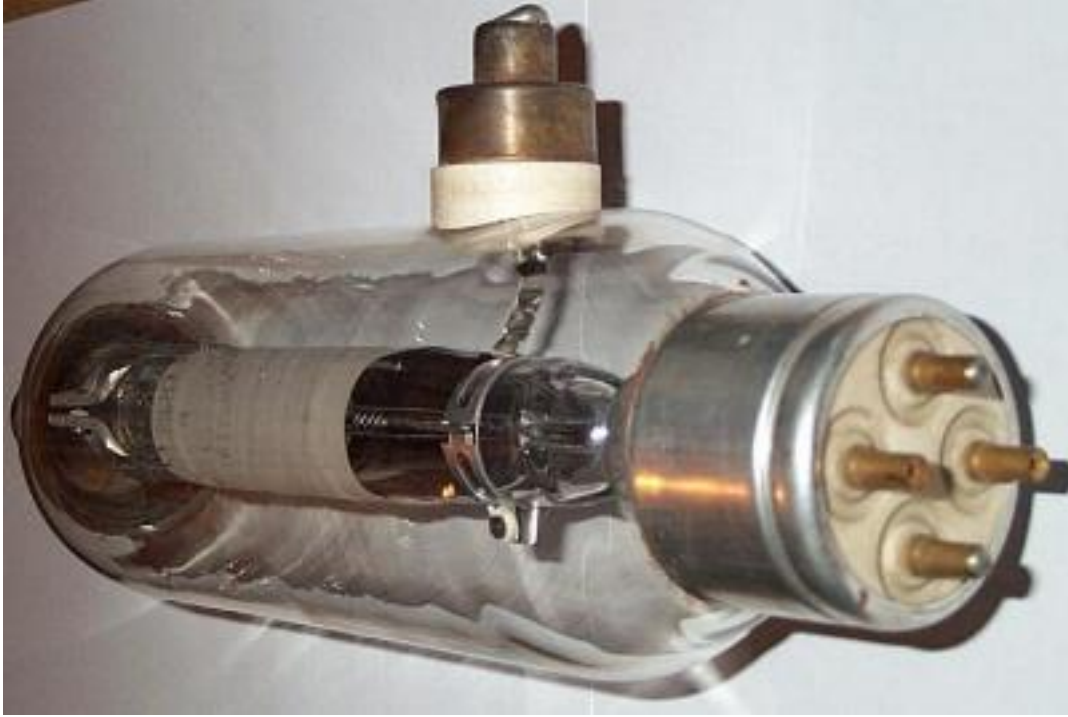

Donated by Petr Fridrich

This file was last modified 15:21:53, Tuesday September 02, 2014