




### RS383 transmitting pentode



This valve measures

Heater voltage	12.6V
Heater current	1.4A
Max anode voltage	1500V
Max screen voltage	450V
Max anode dissipation	160W
Max usable frequency	50MHz

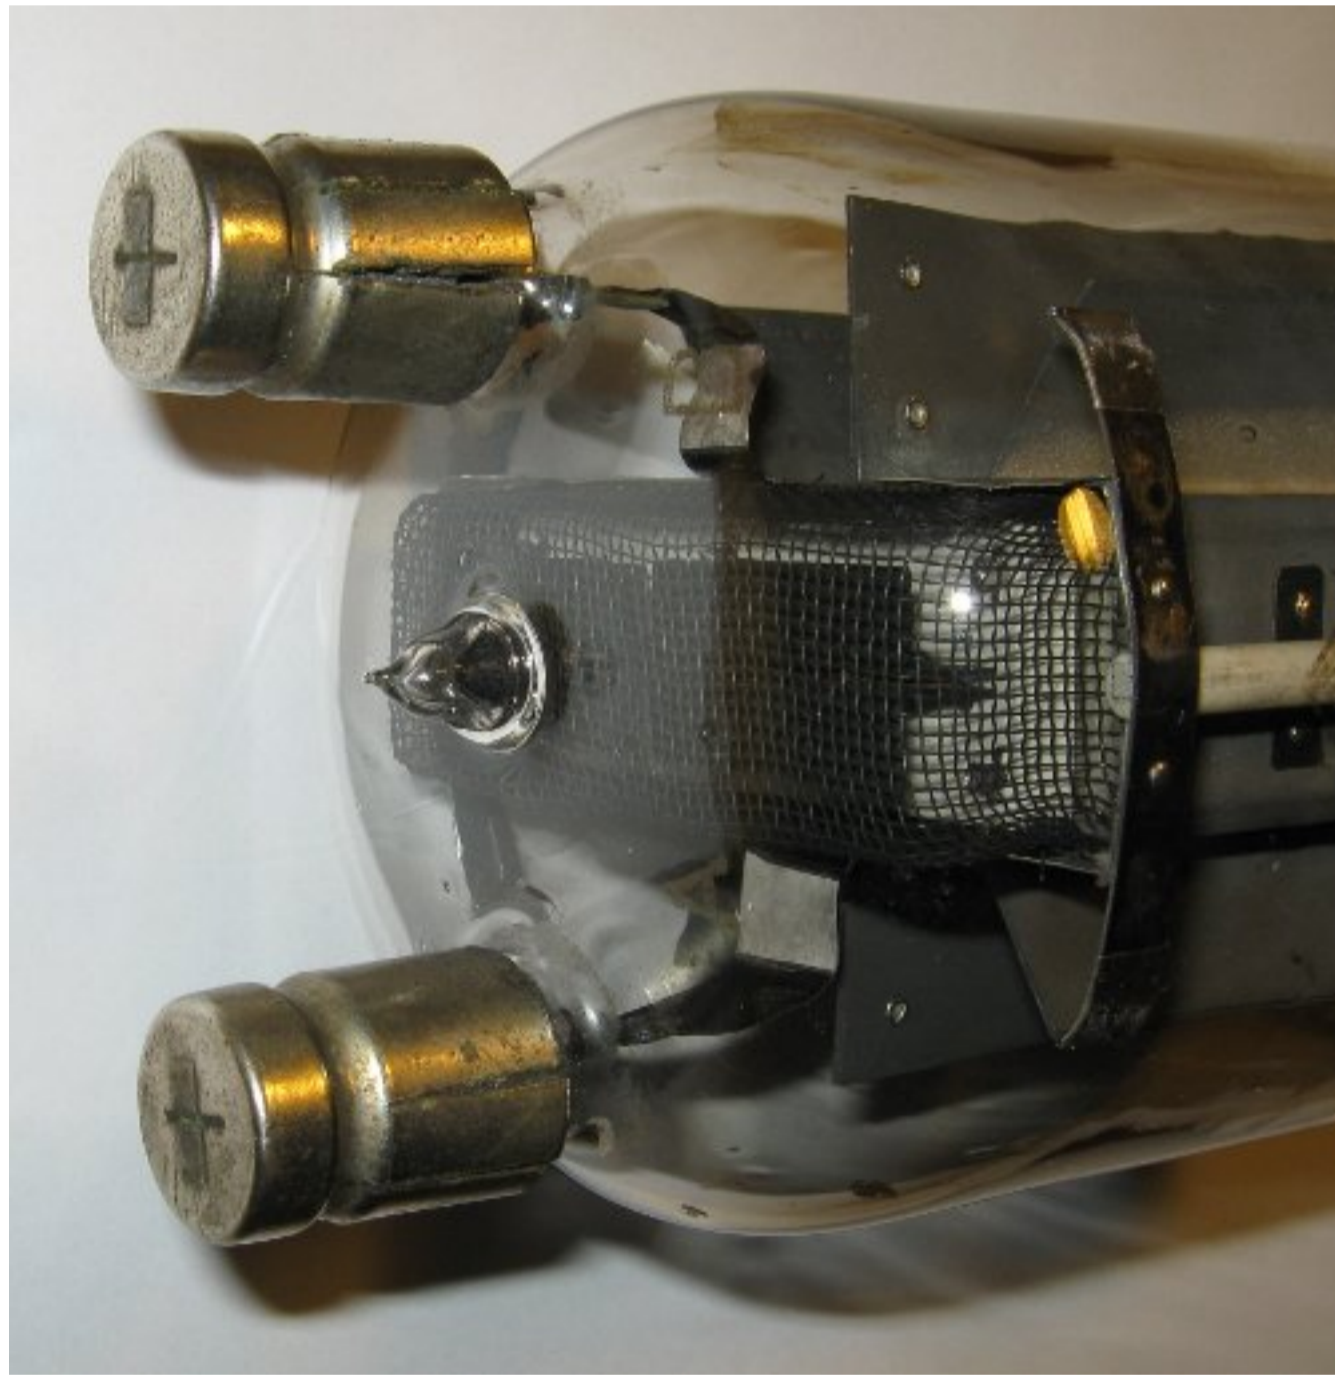

The valve carries the markings Nr. 107488/4544/06

